

FLEXI

FROM SELECT BAG SEALERS



Features and Benefits

- High speed, up to 95 bags/min
- Safe and secure sealing of plastic or paper bags
- Product information printed clearly on the re-useable seal
- Product can be passed through a metal detector after sealing
- Designed for reliability and low maintenance to minimise downtime
- Up to 50,000 seals between reel changes for long production runs
- Paperless tape (Easyseal) option can operate in damp environments
- Stainless steel framework
- Suitable for manual and automatic systems
- Lubrication free pneumatics reduce maintenance
- Electronically adjustable Centre Line facility
- Electronically adjustable product width facility
- Non-Mechanical Interlock with host conveyor
- Operate Interface for diagnostics and running information
- Sleep Mode Facility for energy efficiency
- Full HMI Diagnostics systems, Tape Run Out, Foil Run Out, No Bag Detection, etc.



The SBS-Thurne Flexi Sealer is a highly efficient PLC controlled high-speed bag sealer for the automatic application of adhesive tape to a range of plastic and paper bags. This seal is globally recognised by the food industry as the most cost effective method of sealing bags.

The Thermal printer options available enable the seal to be printed with unique and standard formats such as best before, sell by dates, traceability codes, etc. With up to 150 Programme memories product information can be changed quickly at the touch of a button.


The Flexi Sealer has a unique ability to both electronically raise and lower in order to maintain a correct product centre line, the addition of the product width adjustable system for both narrow and wide products ensures that customer's variety of different sized products are consistently sealed with a high presentation finish.

The Flexi Sealer is non-mechanically interlocked to the host conveyor reducing excessive wear on the bagger conveyor and reducing power consumption. The energy efficiency is further enhanced by a sleep mode function that automatically powers down when periods of product are not available and automatically resets when products become available at the bagger.

The Flexi Sealer can be used for both food and non-food applications. From fresh to frozen, from bread to fruit to sausages to pizza's, the Flexi Sealer minimises downtime and maximises production and cost efficiencies.



Flexi Sealer

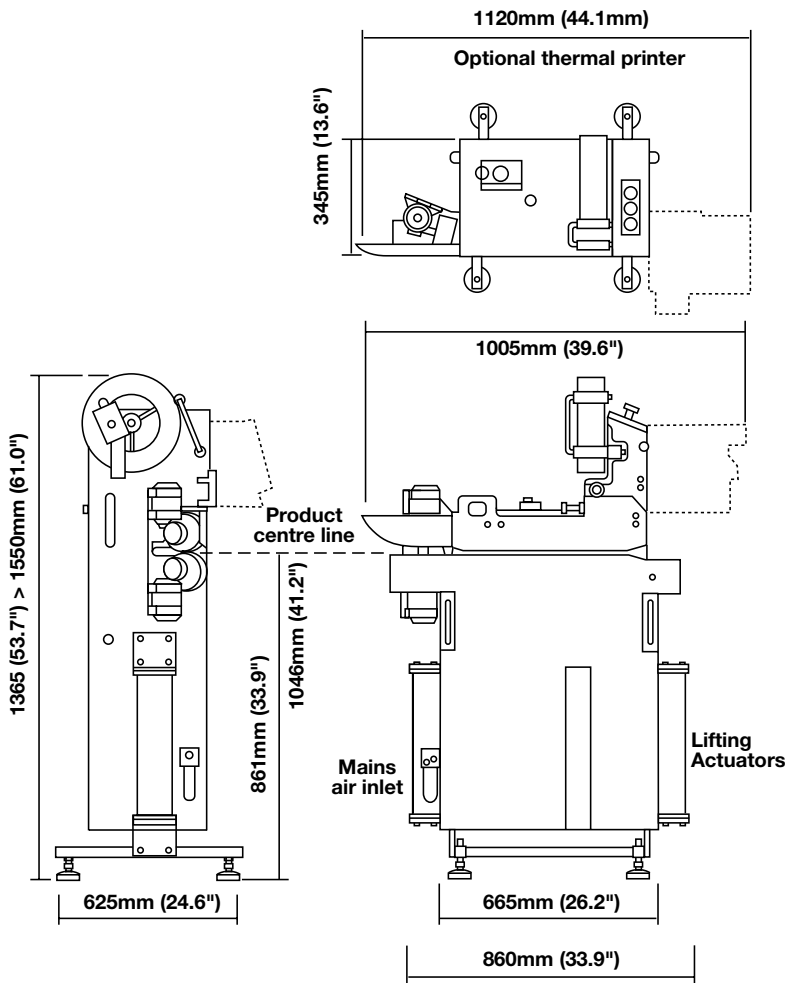

Distributor

Technical Information

Speed Range:

20-95 packs per minute

Speed Deviation:

Variable within above limits

Pneumatic Supply:

50 - 60 PSI (4 bar)

Flight Pitch:

12" - 18"

Electrical Mains Supply:

240v ac Single Phase 50hz. The machine can be adapted for voltage change if required

Construction:

Stainless Steel frame construction

PLC Type:

Rockwell


Machine Weight:

198kgs

Printer Options:

None/Mechanical/Electronic

Machine complies with latest CE regulations

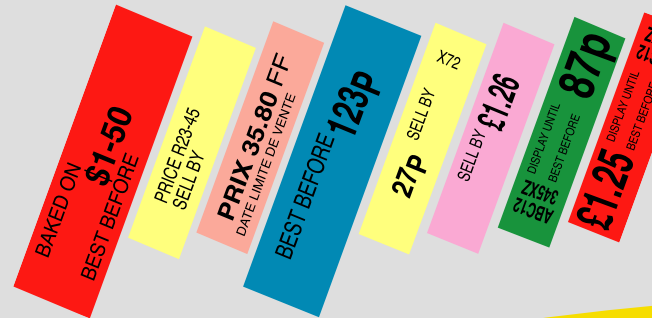

SELECT BAG SEALERS LIMITED
CHENGATE HOUSE
61 PEPPER ROAD
HUNSLET
LEEDS
LS10 2RU

Tel: +44 (0)113 277 3169

Fax: +44 (0)113 270 8733

E-mail: info@selectbagsealers.com

www.selectbagsealers.com